

FM WO Airline Oil

ISO 15

Description

FoodMaster (FM) White Oil (WO) Airline Oil is specially formulated for use with pneumatic tools in the food industry. WO Airline Oil is made exclusively from Paraffinic White Oils and special additive packages. FoodMaster WO Airline Oil is NSF H-1 listed for use in systems in food processing machinery where fluids with incidental food contact approval is required.

Applications

- Airline oilers for pneumatic equipment
- General purpose lubricant

Certifications

Kosher Australia

- K-ID: XSC-PJDD

SCHIMA Halal

- Certificate number: 00562305ASL1/1k

NSF H-1


- Reg #: 145932

Features & Benefits

- FoodMaster WO Airline Oil is chemically and biologically stable, non-comedogenic (don't block skin pores) and does not support pathogenic bacterial growth. Highly refined white oils promote high-performance lubricity and reliable wear protection.
- WO Airline Oil will provide exceptionally long service life and reduce varnish, lacquering and deposits. This performance helps to reduce maintenance costs associated with wear and mineral oil deposits while supporting extended equipment life.
- Similar to mineral oil in their compatibility with paints, seals, gaskets and hoses. No special precautions related to compatibility are required when changing over from a mineral oil lubricant to FoodMaster WO Airline Oil.
- Meets all requirements of FDA Regulation 21 CFR 178.3750
- Good moisture rejection and corrosion protection.

Specifications

Properties	Method	Results
Specific Gravity @ 20°C	ASTM D792	0.853
Kinematic Viscosity @ 40 °C (cSt)	ASTM D445	13.8 – 16.5
Viscosity @ 100 °C (cSt)	ASTM D445	
Flash Point (°C)	ASTM D92	185
Pour Point (°C)	ASTM D97	-9
Polycyclic Aromatic Hydrocarbons	TM 1606	Conform BP
Readily Carbonisable Substances	BP 2002	Conform BP
Solid Paraffin's	BP 2002	Conform BP

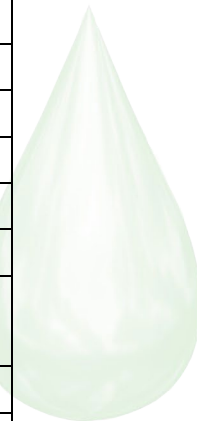



FM WO Airline Oil

ISO 15

Additional Information

Minimum shelf life: The minimum shelf life is approx. 24 months if the product is stored in its unopened original container in a dry, frost-free place.

Technical Data Sheet



Master Item# 2475
Pack Size Availability: 20L, 200L

Last Updated: 19th July 2023

Sydney | Melbourne | Newcastle | New Zealand | Vietnam
AnglomOil Lubricants Group Pty. Ltd. | ABN 83 622 865 091

Int HQ: 2 Beaumont Rd, Mt Kuring-gai NSW 2080 Australia | Australia: P 1300 264 566
Int: P +61 9457 8566 | F +61 2 9457 8057 | E info@anglomoil.com | www.anglomoil.com